



# FIXED CALIPER

P34 e

<del>73</del> 20.B852.83



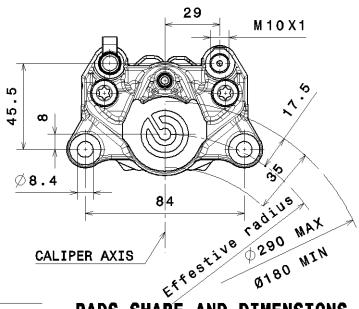


#### DESCRIPTION

Fixed caliper with 2 opposed pistons, realyzed by semicalipers joined by bolts. Construction material: Aluminium Alloy. Operating fluid: brake fluid DOT4. N.B: Drawing shows left side caliper.

> Code 20.B852.73 as shown. Code 20.B852.83 specular.

### PADS SHAPE AND DIMENSIONS



LAST UPDATE: 20.02.17

#### TECHNICAL CHARACTERISTICS

Pistons number and diameter: 2 34 mm Average pad surface

(1 pad):

Cm2 16

MAX working pressure:

70 bar

Mass

"A" Disc position (TOLERANCE): ±0.5 mm

(with not sintered pad):

0.595 Kg

### **CONFIGURATION**

CHARACT.	PADS FRICTION	BODY	MOUNTING	USABLE DISCS	BRAKE FLUID
	MATERIAL	COLOUR	SIDE	THICKNESS	FOR PADS WEAR
20.B852. <mark>73</mark>	FERIT I/D 450 FF	GREY TITANIUM	SX DX	5.0 mm	7 cm³

## **AVAILABLE SPARE PARTS**

CODE PARTS	PADS	BLEEDER SCREW	DUST COVER	SPRING, PIN, CLIP
20.B852.73 83	107.6949.10	105.3387.10	105.1502.20	120.5116.11